



GLOBAL WELD

Unlike welding processes which join two pieces of metal, cutting processes involve separating or severing a piece of metal through intense heat generated to melt the metal. Cutting processes include oxygen and fuel gas and electrical arc gouging.

✉ Global_Weld@gesco-me.com
🌐 <http://www.gesco-me.com/ggt>



About Us

Welcome to GESSCO General Trading LLC, a leading name in the global trading industry with a strong commitment to excellence. Founded on principles of integrity and innovation, GESSCO has established itself as a trusted partner in delivering high-quality products across various sectors.

At GESSCO, we are thrilled to announce our latest expansion into the welding sector with the introduction of our new line of products under the Global Weld brand. Our new range includes premium welding electrodes and accessories designed to meet the highest industry standards. With a focus on durability, efficiency, and performance, Global Weld is set to redefine excellence in welding solutions.

Our welding electrodes are engineered to provide superior arc stability and weld quality, while our accessories are crafted to support a wide range of welding applications. Whether you are involved in heavy industrial projects or precision work, Global Weld products offer reliability and precision to ensure the best results.

With a dedication to customer satisfaction and a commitment to continuous improvement, GESSCO General Trading LLC aims to provide exceptional service and innovative solutions. We are excited to support your needs with our Global Weld brand and look forward to contributing to your success.

Thank you for choosing GESSCO as your partner in excellence.

CATALOGUE CONTENTS

WELDING ELECTRODE..... 04 - 05

WELDING MIG WIRES & TIG ROD 06 - 11

MIG WELDING TORCH & ACCESSORIES 12 - 17

TIG WELDING TORCH & ACCESSORIES 18 - 20

SAFETY & ACCESSORIES..... 21 - 26



SUPER-LH

ELECTRODE FOR MILD AND MEDIUM TENSILE STEELS

CLASSIFICATION

AWS: E- 7018

EN ISO 2560-A: E 42 3 B 4 2 H5

Mild Steel Low Hydrogen Electrodes

DESCRIPTION AND APPLICATIONS


SUPER-LH is a heavy coated low hydrogen iron Powder type electrode designed to weld heavy restrained joints subject to dynamic loading. Weld deposit is tough, ductile and is of RADIOGRAPHIC quality, deposition efficiency exceeds 115%. Typical applications include heavy structures subjected to dynamic loading and impact. Highly restrained joints, boilers and pressure vessels, atomic reactor shells, bridges, railway wagons and coaches, earth moving equipment etc.

CHEMICAL COMPOSITION OF ALL WELD METAL (%)

C	Mn	Si	S	P	Cr	Ni	Mo	V
0.15	1.60	0.75	0.035	0.035	0.20	0.30	0.30	0.08
Max	Max	Max	Max	Max	Max	Max	Max	Max

MECHANICAL PROPERTIES OF ALL WELD METAL

Y.S. Mpa	U.T.S. Mpa	Elongation %	Impact At -30°C Joule
400.0 Min	490.0 Min	22.0 Min	27.0 Min.

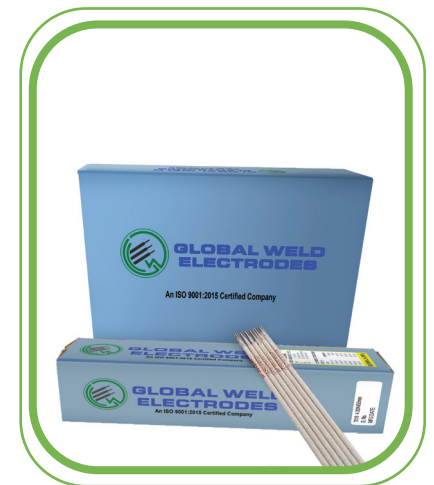

ELECTRODE SIZES AND WELDING CURRENT: AC/DC (+)

SIZE D x L (mm)	2.00 x 300	2.50 x 350	3.15 x 450	4.00 x 450	5.00 x 450	6.3 x 450
CURRENT (Amps)	50 – 70	70 – 100	100 – 140	150 – 190	200 – 250	270 – 320

APPROVALS: - BIS, IRS, LRS, BV, NPCIL, DNV, ABS

PRECAUTIONS:

1. Store the electrodes at dry place.
2. In case of moisture pick up, re-dry the electrodes at 200 250°C for one hour before use.
Clean the weld area thoroughly, free of any surface contamination.



STANDARD

MILD STEEL ELECTRODE FOR RADIOGRAPHIC QUALITY WELD

CLASSIFICATION

AWS: E-6013

IS: ER 4221 X

Mild Steel Electrodes

DESCRIPTION AND APPLICATIONS

A medium heavy coated, rutile type, all position electrode which can be described as "TOUCH" electrode since it can be operated without maintaining an arc gap. Suitable for all types of mild steel structures, tanks and vessels, pipe lines, railway wagons, bridges, ship hull, boilers etc. The weld metal is sound, ductile and is of RADIOGRAPHIC quality.

TYPICAL CHEMICAL COMPOSITION OF ALL WELD METAL (%)

C	Mn	Si	S	P
0.065	0.48	0.22	0.016	0.018

TYPICAL MECHANICAL PROPERTIES OF ALL WELD METAL

Y.S. (0.20% offset) Mpa	U.T.S. Mpa	Elongation %	Impact At 0°C Joule
440.0	500.00	28.0	65.0


ELECTRODE SIZE AND WELDING CURRENT: AC/ DC (-)

SIZE D x L (mm)	2.00 x 300	2.50 x 350	3.15 x 350 / 450	4.00 x 450	5.00 x 450	6.3 x 450
CURRENT (Amps)	40 – 60	60 – 90	100 – 140	140 – 190	180 – 220	270 – 320

APPROVALS: - BIS, IRS, LRS, BV, NPCIL, DNV, ABS

PRECAUTIONS:


1. Store the electrodes at dry place.
2. In case of moisture pick-up, re-dry the electrodes at 100-150°C for one hour before use.
3. Clean the weld area thoroughly, free of any surface contamination.

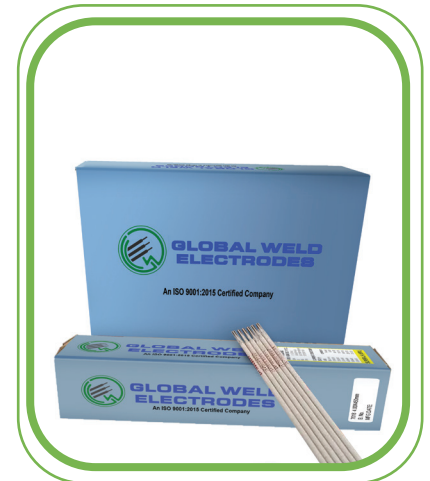



MIG WELDING WIRE ER70S-6

CWER70S6 is a low alloy steel gas shielded welding wire, protected with pure Co₂ or Ar+CO₂ gas. Stable arc, low spatters, excellent fabrication weldability and low sensitivity of weld gas porosity can be obtained during welding. It is suitable for all position welding especially with large welding current range. It can show very good welding performance.

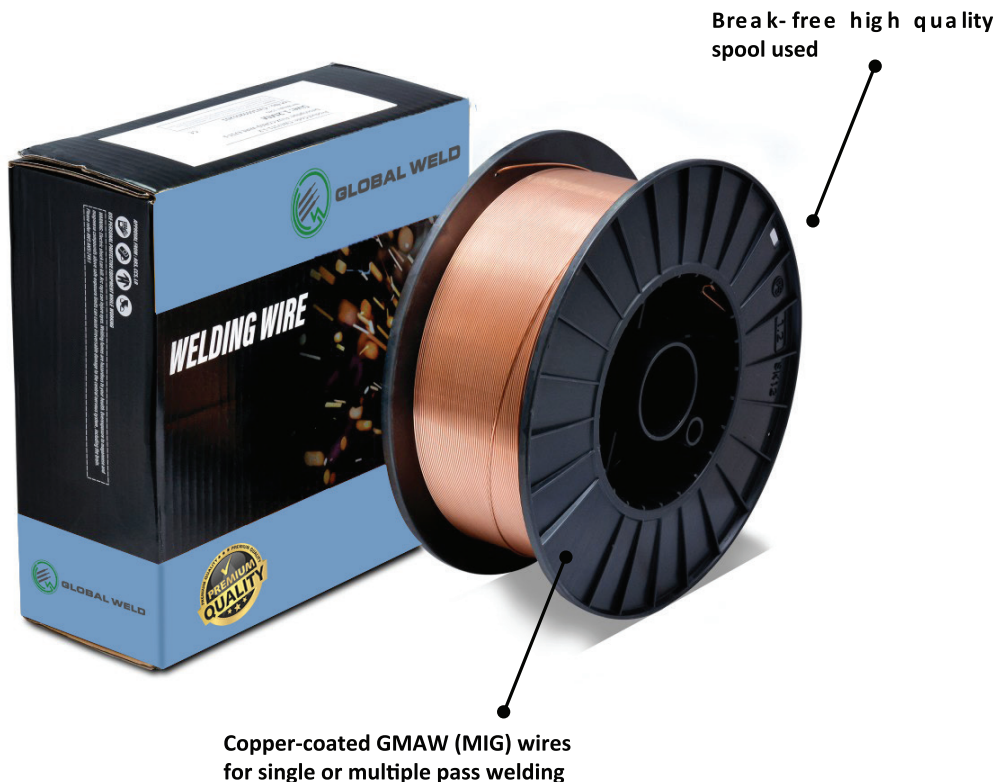

APPLICATION:

Suitable for single-pass and multi-pass welding for structures fabricated by carbon steel and 500MPa grade low alloy steel, such as vehicles, bridges, construction and mechanical structures etc.

CHEMICAL COMPOSITION OF WIRE (%)

	C	Mn	Si	S	P	Cu	Others
STANDARD (TUV/CE)	0.06-0.14	1.30-1.60	0.70-1.0	≤0.025	≤0.025	≤0.35	≤0.50
TYPE	0.08	0.08	0.08	0.08	0.08	0.08	0.08

INSTRUCTIONS:

- A. SUITABLE FOR USING SHIELDING GAS AT THE SPEED OF 20-25 LITERS PER MINUTE.
- B. WINDSHIELD MUST BE SET UP IN THE WELDING ZONE, DUE TO GAS POROSITY MAY BE CAUSED BY WIND.
- C. WIRE EXTENSION SHOULD BE 10-20mm IF THE CURRENT RANGE IS UNDER 300A AND IF ABOVE 300A, 20-25mm

SPECIFICATION AND RECOMMENDED CURRENT RANGE

MIG (GMAW) WIRE					
PART NO.	AWS CLASS	SIZE IN MM			SPOOL/KG
GWER70S6-0.8	AWS ER70S-6	0.08	1.0	1.2	15KG
GWER70S6-1.0	AWS ER70S-6	✓	✓		15KG
GWER70S6-1.2	AWS ER70S-6			✓	15KG

DIAMETER (MM)	Φ 0.8	Φ 1.0	Φ 1.2
F CURRENT(A)	40-180	50-220	80-350
V CURRENT(A)	40-140	50-160	50-150
OH CURRENT(A)	40-120	50-160	80-180



FLUX-CORED WIRE E71T-1

CWE71T1-1.2 is a titanium type and CO₂ gas shielded flux-cored welding wire. It provides excellent performance in welding: stable arc, low spatters, neat weld metal and slag easy to remove. The wire is good for all position welding.



APPLICATION:

Suitable for welding medium and thick plates fabricated by mild steel and 490MPa grade high strength steel. Popularly used in flat and horizontal and fillet welds of vessels, machines and bridges, etc.

CHEMICAL COMPOSITION DEPOSITED METAL (%)

	C	Mn	Si	S	P
STANDARD	≤0.18	≤1.75	≤0.90	≤0.03	≤0.03
TYPICAL	0.07	1.43	0.41	0.011	0.016

INSTRUCTIONS:

- USING CO₂ AS SHIELDING GAS, AND ITS PURITY MUST BE ABOVE 99.98%.
- WINDSHIELD MUST BE SET UP IN THE WELDING ZONE, DUE TO GAS POROSITY MAY BE CAUSED BY WIND.
- THE TEMPERATURE SHOULD BE KEPT BELOW 150C FOR MULTI-PASS WELDING.

DIAMETER AND THE RECOMMENDED CURRENT (DC)

DIAMETER (MM)		1.2MM
VOLTAGE RANGE		25-32
CURRENT RANGE (A)	FLAT HORIZONTAL AND FILLET WELDING	130-250
	HORIZONTAL WELDING	120-190
WIRE EXTENSION		15-25

FLUX-CORED WIRE			
PART NO.	AWS CLASS	SIZE IN MM	
GWE71T1-1.2	AWS A5.20 E71T-1	1.2	15KG



ALUMINIUM & ALUMINIUM ALLOY WELDING WIRE *ER4043 & ER5356*

Alloys based on aluminium and magnesium, Suitable for the TIG/MIG techniques. Used to join aluminium and magnesium base metals. Some alloys are also suit able for the brazing technique.



CHEMICAL COMPOSITION DEPOSITED METAL (%)

Material	Si	Fe	Cu	Mn	Mg	Cr	Zn	Ti	Al
ER4043	4.5-6.0	0.80	0.30	0.05	0.05	/	0.10	0.20	Other
ER5356	0.25	0.40	0.010	0.05-0.20	4.5-5.5	0.05-0.20	0.10	0.06-0.20	Other

MIG - ER4043 - 7KG SPOOL

Part No	DESCRIPTION	SPOOL/KG
GWER4043M-0.8	ALU. MIG WELDING WIRE 0.8mm	7KG
GWER4043M-1.0	ALU. MIG WELDING WIRE 1.0mm	7KG
GWER4043M-1.2	ALU. MIG WELDING WIRE 1.2mm	7KG

MIG - ER5356 - 7KG SPOOL

PART NO	DESCRIPTION	SPOOL/KG
GWER5356M-0.8	ALU. MIG WELDING WIRE 0.8mm	7KG
GWER5356M-1.0	ALU. MIG WELDING WIRE 1.0mm	7KG
GWER5356M-1.2	ALU. MIG WELDING WIRE 1.2mm	7KG

MIG - ER4043 - 1/2 KG SPOOL

PART NO	DESCRIPTION	SPOOL/KG
GWER4043M1/2-0.8	ALU. MIG WELDING WIRE 0.8mm	1/2KG
GWER4043M1/2-1.0	ALU. MIG WELDING WIRE 1.0mm	1/2KG
GWER4043M1/2-1.2	ALU. MIG WELDING WIRE 1.2mm	1/2KG



ALUMINIUM & ALUMINIUM ALLOY WELDING ROD ER4043 - ER5356 -- TIG

Alloys based on aluminium and magnesium, Suitable for the TIG/MIG techniques. Used to join aluminium and magnesium base metals. Some alloys are also suitable for the brazing technique.



CHEMICAL COMPOSITION DEPOSITED METAL (%)

Material	Si	Fe	Cu	Mn	Mg	Cr	Zn	Ti	Al
ER4043	4.5-6.0	0.80	0.30	0.05	0.05	/	0.10	0.20	other
ER5356	0.25	0.40	0.010	0.05-0.20	4.5-5.5	0.05-0.20	0.10	0.06-0.20	other

TIG - ER4043

PART NO	DESCRIPTION	TUBE/KG
GWER4043T-1.6	ALU. TIG WELDING WIRE 1.6mm	5KG
GWER4043T-2.4	ALU. TIG WELDING WIRE 2.4mm	5KG
GWER4043T-3.2	ALU. TIG WELDING WIRE 3.2mm	5KG

TIG - ER5356

PART NO	DESCRIPTION	SPOOL/KG
GWER5356T-1.6	ALU. TIG WELDING WIRE 1.6mm	5kg
GWER5356T-2.4	ALU. TIG WELDING WIRE 2.4mm	5kg
GWER5356T-3.2	ALU. TIG WELDING WIRE 3.2mm	5kg



STAINLESS STEEL WELDING ROD ER308L ER309L ER316L - TIG

Used for the welding of same type of stainless steel, But also for the welding of high-chromium steel and dissimilar steel without heat treatment after welding. The weld metal is austenitic structure containing 19%Cr-12%Ni-2%Mo, Which is excellent in corrosion resistance, Heat resistance and crack resistance. Because Mo contains good corrosion resistance to acetic acid, sulfurous acid, phosphoric acid and salts, especially against chloride ion pitting.



CHEMICAL COMPOSITION DEPOSITED METAL (%)

Material	C	Mn	Si	Cr	Ni	Mo	P	S	Cu
ER308L	0.08	1.00-2.50	0.30-0.65	18.00-20.00	11.00-14.00	2.00-3.00	0.030	0.030	0.75
ER309L	0.21	2.3057	0.5819	23.2747	13.5731	0.0244	0.0143	0.0112	0.001
ER316L	0.06	1.00-2.50	0.30-0.65	18.00-20.00	8.00-20.00	/	0.030	0.030	0.75

TIG - ER308L

PART NO	DESCRIPTION	TUBE/KG
GWER308LT-1.6	SS TIG WELDING WIRE 1.6mm	5KG
GWER308LT-2.4	SS TIG WELDING WIRE 2.4mm	5KG
GWER308LT-3.2	SS TIG WELDING WIRE 3.2mm	5KG

• For best performance use on clean, oil-free and rust-free base material

TIG - ER309L

PART NO	DESCRIPTION	TUBE/KG
GWER309LT-1.6	SS TIG WELDING WIRE 1.6mm	5KG
GWER309LT-2.4	SS TIG WELDING WIRE 2.4mm	5KG
GWER309LT-3.2	SS TIG WELDING WIRE 3.2mm	5KG

TIG - ER316L

Part No	DESCRIPTION	SPOOL/KG
GWER316LT-1.6	SS TIG WELDING WIRE 1.6mm	5KG
GWER316LT-2.4	SS TIG WELDING WIRE 2.4mm	5KG
GWER316LT-3.2	SS TIG WELDING WIRE 3.2mm	5KG



TIG WELDING ROD ER70S-6

ER70S6 welding wire is designed for welding most carbon steel materials. Normal applications include structural steel, carbon steel plate, pipe, fittings, castings, and forgings.



CHEMICAL COMPOSITION DEPOSITED METAL (%)

Material	C	Mn	Si	P	S
ER70S6	0.05-0.10	1.00-2.50	0.30-0.65	0.030	0.010-0.03

TIG - ER70S-6

PART NO	DESCRIPTION	TUBE/KG
GWER70S6T-1.6	TIG WELDING ROD ER70S- 6 1.6X 1000 MM	10
GWER70S6T-2.4	TIG WELDING ROD ER70S- 6 2.4X 1000 MM	10
GWER70S6T-3.2	TIG WELDING ROD ER70S- 6 3.2 X 1000 MM	10



MIG WELDING TORCHES-1000 SERIES



MIG WELDING TORCH {XL15AK}

- Torch are made out of high quality materials to assure high quality performance
- Good availability of consumable parts

COOLING	WIRE LENGTH & SIZE	BOX /PCS
AIR	3MTR-16MM	1
AIR	4MTR-16MM	1

MIG WELDING TORCH {XL25AK}

- Torch are made out of high quality materials to assure high quality performance
- Good availability of consumable parts

COOLING	WIRE LENGTH & SIZE	BOX /PCS
AIR	3MTR-25MM	1
AIR	4MTR-25MM	1



MIG WELDING TORCH {XL36KD}

- Torch are made out of high quality materials to assure high quality performance
- Good availability of consumable parts

COOLING	WIRE LENGTH & SIZE	BOX /PCS
AIR	3MTR-35MM	1
AIR	4MTR-35MM	1

MIG WELDING TORCH {XL40KD}

- Torch are made out of high quality materials to assure high quality performance
- Good availability of consumable parts

COOLING	WIRE LENGTH & SIZE	BOX /PCS
AIR	4MTR-50MM	1






MIG WELDING TORCH ACCESSORIES-1000 SERIES

GAS NOZZLE CONICAL



PART NO	DESCRIPTION	PKT/PCS
GW1184	XL15AK	5
GW1182	XL25AK	5
GW1183	XL36KD	5
GW1184	XL40KD	5

CONTACT TIP HOLDER



PART NO	DESCRIPTION	PKT/PCS
GW1160	XL15AK(M6)	10
GW1161	XL25AK(M6)	10
GW1171	XL36KD(M6)	10
GW1172	XL36KD(M8)	10
GW1173	XL40KD(M8)	10

CONTACT TIP



PART NO	DESCRIPTION	PKT/PCS
GW1060	M6X0.8mm	10
GW1061	M6X1.0mm	10
GW1062	M6X1.2mm	10
GW1063	M6X1.4mm	10
GW1064	M6X1.6mm	10
GW1055	M8X0.8mm	10
GW1056	M8X1.0mm	10
GW1057	M8X1.2mm	10
GW1058	M8X1.6mm	10
GW1100	M6X1.2mm aluminium	
GW1101	M8X1.2mm aluminium	

GAS DIFFUSER



PART NO	DESCRIPTION	PKT/PCS
GW1191	XL36KD	10
GW1192	XL40KD	10

CONTACT TIP




PART NO	DESCRIPTION	PKT/PCS
GW1050	M6X0.8mm	10
GW1051	M6X1.0mm	10
GW1052	M6X1.2mm	10
GW1053	M6X1.6mm	10

SWAN NECK



PART NO	DESCRIPTION	PKT/PCS
GW1200	XL15AK	1
GW1201	XL25AK	1
GW1202	XL36KD	1
GW1203	XL40KD	1

STEEL LINER- INSULATED




PART NO	DESCRIPTION	PKT/PCS
GW1300	(1.0-1.2) 3MTR (RED)	1
GW1301	(1.0-1.2) 4MTR (RED)	1
GW1302	(1.2-1.6) 3MTR (YELLOW)	1
GW1303	(1.2-1.6) 4MTR (YELLOW)	1

TORCH SWITCH



PART NO	DESCRIPTION	PKT/PCS
GW1400	MIG TORCH SWITCH	10

PTFE LINER/TEFLON LINER



PART NO	DESCRIPTION	PKT/PCS
GW1306	(1.0-1.2) 3MTR (RED)	1
GW1307	(1.0-1.2) 4MTR (RED)	1
GW1308	(1.6) 3MTR (YELLOW)	1
GW1309	(1.6) 4MTR (YELLOW)	1



MIG WELDING TORCH -6000 SERIES



MIG WELDING TORCH {XLPSF250}

- Torch are made out of high quality materials to assure high quality performance
- Good availability of consumable parts

PART NO	COOLING	WIRE LENGTH & SIZE	BOX /PCS
GW6000	AIR	3MTR	1
GW6001	AIR	4MTR	1



MIG WELDING TORCH {XLPSF305}

- Torch are made out of high quality materials to assure high quality performance
- Good availability of consumable parts

PART NO	COOLING	WIRE LENGTH & SIZE	BOX /PCS
GW6002	AIR	3MTR	1
GW6003	AIR	4MTR	1



MIG WELDING TORCH {XLPSF405}

- Torch are made out of high quality materials to assure high quality performance
- Good availability of consumable parts

PART NO	COOLING	WIRE LENGTH & SIZE	BOX /PCS
GW6004	AIR	3MTR	1
GW6005	AIR	4MTR	1





MIG WELDING TORCH ACCESSORIES - 6000 SERIES

GAS NOZZLE

PART NO	DESCRIPTION	PKT/PCS
GW6181	(XLPSF2500) 12x73	5
GW6182	(XLPSF305) 16x80	5
GW6183	(XLPSF405) 17x80	5



CONTACT TIP

PART NO	DESCRIPTION	PKT/PCS
GW6050	M6X0.8MM	10
GW6051	M6X1.0MM	10
GW6052	M6X1.2MM	10
GW6053	M6X1.6MM	10
GW6055	M8X0.8MM	10
GW6056	M8X1.0MM	10
GW6057	M8X1.2MM	10
GW6058	M8X1.6MM	10
GW6100	M6X1.2MM ALU	10
GW6101	M8X1.2MM ALU	10



TIP ADAPTOR

PART NO	DESCRIPTION	PKT/PCS
GW6160	(XLPSF250) M6	10
GW6161	(XLPSF305) M6	10
GW6162	(XLPSF405) M8	10



STEEL LINER - INSULATED

PART NO	DESCRIPTION	PKT/PCS
GW6200	(0.9-1.0) 3MTR, (RED)	1
GW6201	(0.9-1.0) 4MTR, (RED)	1
GW6203	(1.0-1.2) 3MTR, (RED)	1
GW6204	(1.0-1.2) 4MTR, (RED)	1



SWAN NECK

PART NO	DESCRIPTION	PKT/PCS
GW6250	XLPSF250	1
	XLPSF305	1
GW6252	XLPSF405	1





MIG WELDING TORCH -7000 SERIES



MIG WELDING TORCH {300A HD}

- Torch are made out of high quality materials to assure high quality performance
- Good availability of consumable parts

PART NO	COOLING	WIRE LENGTH & SIZE	BOX /PCS
GW7000	AIR	4.5MTR	1



MIG WELDING TORCH {400A HD}

- Torch are made out of high quality materials to assure high quality performance
- Good availability of consumable parts

PART NO	COOLING	WIRE LENGTH & SIZE	BOX /PCS
GW7001	AIR	4.5MTR	1



MIG WELDING TORCH {500A HD}

- Torch are made out of high quality materials to assure high quality performance
- Good availability of consumable parts

PART NO	COOLING	WIRE LENGTH & SIZE	BOX /PCS
GW7002	AIR	4.5MTR	1





MIG WELDING TORCH ACCESSORIES -7000 SERIES



GAS DIFFUSER

PART NO	DESCRIPTION	PKT/PCS
GW7075	300A(XL4323R)	10
GW7076	400/500A(XL10012)	10



SWAN NECK

PART NO	DESCRIPTION	PKT/PCS
GW7025	300A/400A(XLQT3-45)	1
GW7026	500A(XLQT5-45)	



STEEL LINER

PART NO	DESCRIPTION	PKT/PCS
GW7091	0.9-1.2MM, 4.5MTR (XL43115)	1
GW7092	1.2-1.6MM, 4.5MTR(XL44215)	1
GW7093	1.6-2MM, 4.5MTR(XL44315)	1



CONTACT TIP

PART NO	DESCRIPTION	PKT/PCS
GW7061	0.8MM(XLT-030)	10
GW7062	1.0MM(XLT-039)	10
GW7063	1.2MM(XLT-045)	10



TIP ADAPTOR

PART NO	DESCRIPTION	PKT/PCS
GW7055	300A/400A(XLDS-1)	10
GW7056	400/500A(XLD-1)	10



GAS NOZZLE

PART NO	DESCRIPTION	PKT/PCS
GW7040	300A(XLNS-5800)	5
GW7042	400/500A(XLN-5800C)	5



TUNGSTEN ELECTRODE



ISO 6848 COLOR CHART	SIZE		PART #	
	INCHES	MILLIMETERS	10PIECE	3PIECE P.O.P.
2% Thoriated Red AWS A5.12 EWTh-2 ISO 6848 WT20	.020 x 7"	0.5 x 175mm	T0207GT2	
	.040 x 7"	1.0 x 175mm	T0407GT2	
	1/16 x 7"	1.6 x 175mm	T1167GT2	T1167GT2-3
	3/32 x 7"	2.4 x 175mm	T3327GT2	T3327GT2-3
	1/8 x 7"	3.2 x 175mm	T187GT2	T187GT2-3
.8% Zirconiated White AWS A5.12 EWZr-8 ISO 6848 WZ8	5/32 x 7"	4.0 x 175mm	T5327GT2	
	.020 x 7"	0.5 x 175mm	T0207GZ	
	.040 x 7"	1.0 x 175mm	T0407GZ	
	1/16 x 7"	1.6 x 175mm	T1167GZ	T1167GZ-3
	3/32 x 7"	2.4 x 175mm	T3327GZ	T3327GZ-3
1.5% Lanthanated Gold AWS A5.12 EWLa-1.5 ISO 6848 WL15	1/8 x 7"	3.2 x 175mm	T187GZ	T187GZ-3
	5/32 x 7"	4.0 x 175mm	T5327GZ	
	.020 x 7"	0.5 x 175mm	T0207GL	
	.040 x 7"	1.0 x 175mm	T0407GL	
	1/16 x 7"	1.6 x 175mm	T1167GL	T1167GL-3
2% Ceriated Gray AWS A5.12 EWCe-2 ISO 6848 WC20 (Formerly Orange)	3/32 x 7"	2.4 x 175mm	T3327GL	T3327GL-3
	1/8 x 7"	3.2 x 175mm	T187GL	T187GL-3
	5/32 x 7"	4.0 x 175mm	T5327GL	
	.020 x 7"	0.5 x 175mm	T0207GC2	
	.040 x 7"	1.0 x 175mm	T0407GC2	
Pure Green AWS A5.12 EWP ISO 6848 WP	1/16 x 7"	1.6 x 175mm	T1167GC2	T1167GC2-3
	3/32 x 7"	2.4 x 175mm	T3327GC2	T3327GC2-3
	1/8 x 7"	3.2 x 175mm	T187GC2	T187GC2-3
	5/32 x 7"	4.0 x 175mm	T5327GC2	
	.020 x 7"	0.5 x 175mm	T0207G	
2% Lanthanated Blue AWS A5.12 EWLa-2 ISO 6848 WL20	.040 x 7"	1.0 x 175mm	T0407G	
	1/16 x 7"	1.6 x 175mm	T1167G	T1167G-3
	3/32 x 7"	2.4 x 175mm	T3327G	T3327G-3
	1/8 x 7"	3.2 x 175mm	T187G	T187G-3
	5/32 x 7"	4.0 x 175mm	T5327G	
LaYZr™ Chartreuse AWS A5.12 EWG ISO 6848	.020 x 7"	0.5 x 175mm	T0207GL2	
	.040 x 7"	1.0 x 175mm	T0407GL2	
	1/16 x 7"	1.6 x 175mm	T1167GL2	T1167GL2-3
	3/32 x 7"	2.4 x 175mm	T3327GL2	T3327GL2-3
	1/8 x 7"	3.2 x 175mm	T187GL2	T187GL2-3
LaYZr™ Chartreuse AWS A5.12 EWG ISO 6848	5/32 x 7"	4.0 x 175mm	T5327GL2	
	.020 x 7"	0.5 x 175mm	T0207GTM	
	.040 x 7"	1.0 x 175mm	T0407GTM	
	1/16 x 7"	1.6 x 175mm	T1167GTM	T1167GTM-3
	3/32 x 7"	2.4 x 175mm	T3327GTM	T3327GTM-3
	1/8 x 7"	3.2 x 175mm	T187GTM	T187GTM-3
	5/32 x 7"	4.0 x 175mm	T5327GTM	





TIG WELDING TORCHES-3000 SERIES



TIG WELDING TORCH

- Torch are made out of high quality materials to assure high quality performance
- Torch available in two models with and without valve
- Gas & power separate




PART NO	DESCRIPTION	COOLING	CABLE AND CONNECTOR SIZE	WIRE LENGTH	BOX/PCS
GW3000	WP-17FV(FLEXIBLE-VALVE)	AIR	16mm(10-25)	4MTR	1
GW3001	WP-17F(FLEXIBLE-WITHOUT VALVE)	AIR	16mm(10-25)	4MTR	1



TIG WELDING TORCH

- Torch are made out of high quality materials to assure high quality performance
- Torch available in two models with and without valve
- Gas & power separate



PART NO	DESCRIPTION	COOLING	CABLE AND CONNECTOR SIZE	WIRE LENGTH	BOX/PCS
GW6002	WP-18FV(FLEXIBLE-VALVE)	AIR	25mm(35-50)	4MTR	1
GW6003	WP-18FV(FLEXIBLE-VALVE)	AIR	25mm(35-50)	4MTR	1



TIG WELDING TORCH

- Torch are made out of high quality materials to assure high quality performance
- Torch available in two models with and without valve
- Gas & power separate

PART NO	DESCRIPTION	COOLING	CABLE AND CONNECTOR SIZE	WIRE LENGTH	BOX/PCS
GW3004	WP-26F(FLEXIBLE-WITHOUT VALVE)	AIR	25mm(35-50)	4MTR	1
GW3005	WP-26FV(FLEXIBLE-VALVE)	AIR	25mm(35-50)	4MTR	1



TIG WELDING TORCH

- Torch are made out of high quality materials to assure high quality performance
- Torch available in two models with and without valve
- Gas & power separate



PART NO	DESCRIPTION	COOLING	CABLE AND CONNECTOR SIZE	WIRE LENGTH	BOX/PCS
GW6002	WP-26F(FLEXIBLE-WITHOUT VALVE)	AIR	25mm	4MTR	1




TIG WELDING TORCH ACCESSORIES- 3000 SERIES

TIG TORCH BODY




PART NO	DESCRIPTION	PKT/PCS
GW3050	WP-17F(FLEXIBLE WITH VALVE)	1
GW3051	WP-17F(FLEXIBLE WITHOUT VALVE)	1
GW3052	WP-18F(FLEXIBLE WITHOUT VALVE)	1
GW3053	WP-18F(FLEXIBLE WITH VALVE)	1
GW3054	WP-26F(FLEXIBLE WITH VALVE)	1
GW3055	WP-26F(WITH VALVE)	1
GW3056	WP-26F(FLEXIBLE WITHOUT VALVE)	1

COLLET




PART NO	DESCRIPTION	PKT/PCS
GW143	(10N25) 1.6MM	5
GW142	(10N25) 2.4MM	5
GW141	(10N25) 3.2MM	5

CERAMIC CUP



PART NO	DESCRIPTION	PKT/PCS
GW173	(796F70) NO.3	10
GW174	(10N50) NO.4	10
GW175	(10N49) NO.5	10
GW176	(10N48) NO.6	10
GW177	(10N47) NO.7	10
GW178	(10N46) NO.8	10

LONG BACK CAP



PART NO	DESCRIPTION	PKT/PCS
GW162	LONG BACK CAP	2

COLLET BODY



PART NO	DESCRIPTION	PKT/PCS
GW145	(10N31) 1.6mm	5
GW146	(10N32) 2.4mm	5
GW147	(10N28) 3.2mm	5

SHORT BACK CAP



PART NO	DESCRIPTION	PKT/PCS
GW164	SHORT BACK CAP	2

TORCH SWITCH



PART NO	DESCRIPTION	PKT/PCS
GW3101	TIG TORCH SWITCH	1

TRIGGER SWITCH



PART NO	DESCRIPTION	PKT/PCS
GW3100	TRIGGER SWITCH	1





GRANGE / GREY

HEAVY DUTY GLOVES

- Cow split leather
- Grey color and back orange drill cotton
- Rubberized safety cuff

Application: Welding

Carton quantity: 120 Pair/Ctn



GREY / WHITE

HEAVY DUTY GLOVES

- Cow split leather
- Grey color and back orange drill cotton
- Rubberized safety cuff

Application: Welding

Carton quantity: 120 Pair/Ctn



YELLOW / GREY

HEAVY DUTY GLOVES

- Cow split leather
- Grey color and back orange drill cotton
- Rubberized safety cuff

Application: Welding

Carton quantity: 120 Pair/Ctn



HEAVY DUTY GLOVES

- Cow split leather
- Grey color and back orange drill cotton
- Rubberized safety cuff

Application: Welding

Carton quantity: 60 Pair/Ctn



HEAVY DUTY GLOVES

- Cow split leather
- Grey color and back orange drill cotton
- Rubberized safety cuff

Application: Welding

Carton quantity: 60 Pair/Ctn



TIG WELDING 14"

HEAVY DUTY GLOVES

- Cow split leather
- Grey color and back orange drill cotton
- Rubberized safety cuff

Application: Welding

Carton quantity: 100 Pair/Ctn





TIG WELDING 11"

HEAVY DUTY GLOVES

- Cow split leather
- Grey color and back orange drill cotton
- Rubberized safety cuff

Application: Welding

Carton quantity: 100 Pair/Ctn



TIG GUARD 12"

HEAVY DUTY GLOVES

- Cow split leather
- Grey color and back orange drill cotton
- Rubberized safety cuff

Application: Welding

Carton quantity: 100 Pair/Ctn



TIG DRIVER 10"

HEAVY DUTY GLOVES

- Cow split leather
- Grey color and back orange drill cotton
- Rubberized safety cuff

Application: Welding

Carton quantity: 200 Pair/Ctn



WELDING APRON

HEAVY DUTY GLOVES

- Cow split leather
- Grey color and back orange drill cotton
- Rubberized safety cuff

Application: Welding

Carton quantity: 50 Pair/Ctn



WELDING APRON

HEAVY DUTY GLOVES

- Cow split leather
- Grey color and back orange drill cotton
- Rubberized safety cuff

Application: Welding

Carton quantity: 50 Pair/Ctn



HAND SLEEVE 23"

HEAVY DUTY GLOVES

- Cow split leather
- Grey color and back orange drill cotton
- Rubberized safety cuff

Application: Welding

Carton quantity: 25 Pair/Ctn





FIRE BLANKEN / WHITE

FIRE BLANKET 1X25M
FIRE BLANKET 1X50M
FIRE BLANKET 1MMX1X25M
FIRE BLANKET 1MMX1X50M

Application: Welding
Carton quantity: 1 Pcs/Ctn



FIRE BLANKET GOLD

HEAVY DUTY GLOVES

- High performance fiber glass fabric
- Working temperature 50 c to 550 c
- Weights 430g/square meter

Application: Welding
Carton quantity: 1 Pcs/Ctn



FIRE BLANKET 4X4 (1.2X1.2MTR) FIRE BLANKET 4X6 (1.2X1.8MTR)

HEAVY DUTY GLOVES

- High performance fiber glass fabric
- Working temperature 50 c to 550 c
- Weights 430g/square meter

Application: Welding
Carton quantity: 20 Pcs/Ctn



WELDING CURTAIN

RED, YELLOW, GREEN

- Composed of high grade vinyl film
- processed with color dye
- Enhanced grommets on four sides
- Size 6x6

Application: Welding
Carton quantity: 10 Pcs/Ctn



FIRE BLANKET / FEATHER EDGE

1X25MTR, 251109 - 1X50MTR

- High performance fiber glass fabric
- Weights about 430g/square meter
- working temperature 50c to 550c
- SIZES AVAILABLE - 1x25m & 1x50m

Application: Welding
Carton quantity: 1 Pcs/Ctn



WH-A / HAND SHIELD

WELDING SHIELD

- Designed to protect your face and eyes from sparks and spatter
- Lightweight and easy to handle

Application: Welding

Carton quantity: 20 Pcs/Ctn



WHF02 / WELDING HELMET

HEAVY-DUTY WELDING HELMET

- Light weight thermo plastic
- Fully adjustable suspension

Application: Welding

Carton quantity: 20 Pcs/Ctn



WELDING HELMET-AUTO DARKENING

WELDING HELMET

- Lightweight high strength helmet
- Suitable for ARC/MIG/TIG Welding
- High clear view filter
- Solar cell technology for continuous power supply

Application: Welding

Carton quantity: 6 Pcs/Ctn



AIR HOSE

HEAVY-DUTY AIR HOSE

(1/4") 6MM X 50MTR
(5/8") 8MM X 50MTR
(3/8") 10MM X 50MTR
(1/2") 12.5MM X 50MTR
(3/4") 18.5MM X 50MTR
(1") 6MM X 50MTR

- Polyvinyl chloride
- High pressure air hose
- Made in Korea
- SIZE - 3/4" 50m

Carton quantity: 1 Roll



MULTY PURPOSE HOSE

- Inner tube: Black, smooth NBR
- Temperature rang : -30 C to + 85 C
- Application: to transporting Air, Water, Gas, Oil, Fuel using in Automotive or Machine
- Outer tube: Red, NR/SBR blended, weather, Ozone and abrasion resistant
- WP: 20 BAR / 300 PSI
- BP: 60 BAR/ 900 PSI

(1/4") 6MM X 50MTR
(3/8") 10MM X 50MTR
(1/2") 13MM X 50MTR
(1") 25MM X 50MTR

Carton quantity: 1 Roll



TWIN HOSE

(1/4") 6.5MM X 100 YARD
(1/4") 6.5MM X 30MTR
(1/5") 6.5MM X 15MTR

Carton quantity: 1 Roll



CW-122 / EARTH CLAMP

HEAVY-DUTY WELDING EARTH CLAMP 500AMP

Application: Welding
Carton quantity: 30 Pcs/Ctn



CW-402 CABLE CONNECTOR

HEAVY DUTY CABLE CONNECTOR

SIZE - 10-25

Application: Welding
Carton quantity: 30 Pcs/Ctn



PANEL SOCKET

HEAVY-DUTY PANEL SOCKET

CW-400 -- (10-25)

CW-401 -- (35-50)

Application: Welding



Spark Lighter 3 Flint

- Triple-flint lighter is a quality lighter made for the demands of the welding industry. It has a strong frame and three large flint for dependable ignition under all working conditions.
- Lightweight and low-cost



Cable Lug

- Made of Copper Pipe OD 17.00 x id 14.50mm
- Cable Capacity = 50-70 mm²
- Stud Hole = 13.5mm



American L-Series EHL60

35%:
600 Amp

Type : 1



60%:
500 Amp



95mm²
(3/0)



6.3 -
10mm



30 Pcs



Electrode Quiver

Voltage: 110V / 220V

Wattage: 200W

Electrode Capacity: 10kg / 22Lbs

Temp Range:

Description:

10KG ELECTRODE OVEN
110 V W/BASKET



ARCAIR[®]
AN **ESAB**[®] BRAND

VICTOR[®]
AN **ESAB**[®] BRAND

SHURLITE[®] Made in U.S.A.

TWECO[®]
AN **ESAB**[®] BRAND

 **WESTERN**
ENTERPRISES

 **BEST WELDS**[®]



GLOBAL WELD

✉ Global_Weld@gesco-me.com
🌐 <http://www.gesco-me.com/ggt>